

# RS PRO DL LED 15W

All good things come from above.

The first LED downlighter with high-frequency sensor from Steinel.

Only from STEINEL. The RS PRO LED DL 15 W LED is the first HF-sensor controlled LED downlighter from Steinel that can be integrated in the ceiling. But there's not a lot of it you can see. Because once in place, the entire system fits flush with the suspended ceiling. In no time at all, thanks to easy-fit clamp-type retainer. Using interconnected slave versions, RS PRO DL 15 W LED provides even greater energy efficiency.

RS  
PRO  
SYSTEM

LED  
LONG LIFE



**LED**

30 years  
( $\varnothing$  4,5h/day)

**15w**

925lm  
61,6lm/W



high frequency  
sensor 360°



$\varnothing$  2-8m



2,5-3,5m



2-2000 lux



1 min-60 min



basic  
brightness



networkable  
cable



energy  
saving

**5 JAHRE**  
GARANTIE

functional  
warranty



EAN Downlight RS PRO DL LED 15W CW	4007841 007713
EAN Downlight RS PRO DL LED 15W Slave CW	4007841 007720
EAN Downlight RS PRO DL LED 15W WW	4007841 007744
EAN Downlight RS PRO DL LED 15W Slave WW	4007841 007737
Dimensions (H x W x D)	$\varnothing$ 142,5 x 94,5 mm
Power supply	100-240 V, 50/60Hz (can be operated on direct current in emergency lighting mode)
Sensor type	High frequency
Transmitter power	approx. 1 mW
HF system	5.8 GHz (responds to the smallest of movements regardless of temperature)
Output	15W
Brightness	925 lm
Efficiency	61.6 lm/W
Colour temperature WW	3000 K / SDCM 5
Colour temperature CW	4000 K / SDCM 5
Colour rendering	Ra $\geq$ 80
LED life expectancy	50,000 h (L70B10 to LM80)
LED cooling system	Passive Thermo Control
Angle of coverage	360° with 160° angle of aperture
Detection	also through glass, wood and stud walls
Reach*	2 - 8 m all-round
Max. area covered	50 m <sup>2</sup>
Response light level*	2 - 2000 lx
Basic light level	Dimmed to 10 %, a) all night long, b) 10 min. after expiry of the set time,
Time setting*	1 min. - 1 h
IP rating	IP20
Protection class	II
Temperature range	- 10 to +50 °C
With lamp	STEINEL LED system

### Accessories


EAN remote control RC2 . . . . . 4007841 737818  
Refer to the 'Accessories' section for further information.



Slave version  
without sensor

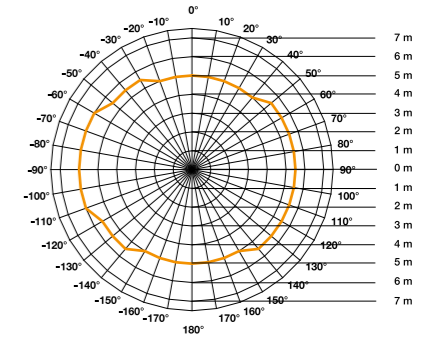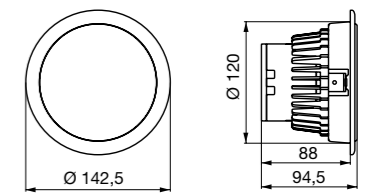


RS PRO DL LED 15 W detection zone  
Mounting height 2.8 m  
orange = radial walking direction



Light distribution curve for RS PRO DL LED 15W

High-Frequency  
Sensor Lights  
for Indoors



Including STEINEL  
LED system



Intelligent LED  
(ATC) cooling system



Ceiling-flush  
installation



Interconnectable by  
cable, maximum of  
20 units



Can only be set  
by optional remote  
control RC2

