

# XSolar GL-S

**Instantly impresses.**  
**With efficiency and design.**

Well-illuminated drives and paths to your front door give you and your guests the reassuring feeling of safety and security. The stand-mounted version of our efficient solar light lets you combine this with aesthetic elegance. Simply choose the stylish stand in the appropriate height – and illuminate up to 20 sq.m. with bright LED light. No energy costs whatsoever. With an LED life expectancy of 50,000 hours, changing a bulb is also a thing of the past.



**365 TAGE LICHT**

Light 365 days of the year

**1,2w**

150lm  
124lm/W



20qm



4000K  
cool-white



infrared  
sensor 140°



5m



1m



2 lux




IP44

**3 JAHRE GARANTIE**

functional warranty

EAN XSolar GL-S white	4007841 671204
EAN XSolar GL-S silver	4007841 671211
Dimensions (h x w x d)	1178 x 189 x 186.5 mm
Power supply	Solar, no mains power required
Sensor type	passive infrared
Output (lights)	1.2 W
Brightness	150 lm
Efficiency	124 lm/W
Colour temperature	4000K/SDCM 5
Colour rendering	Ra ≥ 80
LED life expectancy	50,000 h (L70B10 to LM80)
LED cooling system	Passive Thermo Control
Angle of coverage	140°
Reach	5 m
Twilight setting	2 lx
Time setting	dynamic
Basic light level	yes
IP rating	IP44
Protection class	III
Material	support stand in aluminium, UV-resistant plastic
Temperature range	-20 to +40°C
With lamp	STEINEL LED system

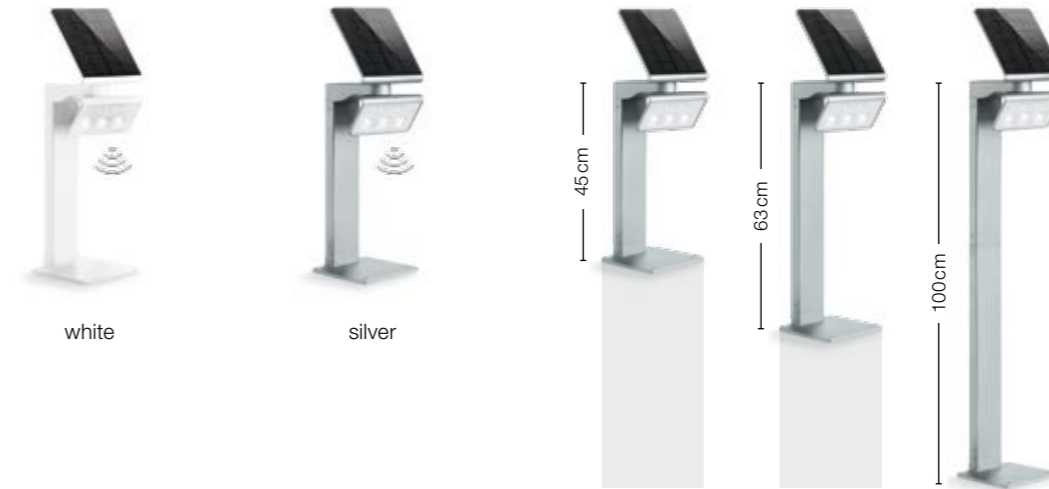

3 standing heights to choose from



High-quality mono-crystalline solar panel



Including STEINEL LED system



Optional basic lighting level



Compass for setting the panel to face the optimum direction



including 2500 mAh lithium-iron-phosphate rechargeable battery

