
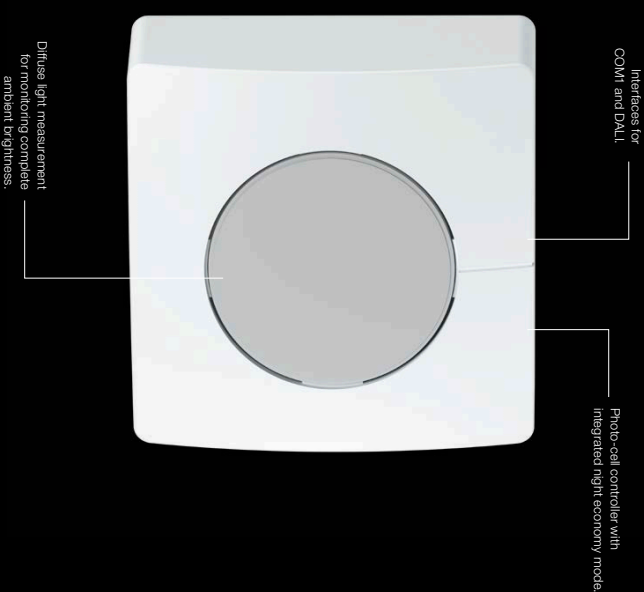


Night illumination as the mood dictates. And exactly so. NM 5000-3

Lighting generates emotions! Dramatic shop windows staged with lighting accents, and hoardings or building facades attract the attention of the observer and project the image of the owner. All automatically. Whenever the day goes to sleep, NightMatic 5000-3 wakes up and controls the finest lighting effects. Exactly when it really makes sense to and is wanted, thanks to the numerous setting options. On the technical side, the NightMatic 5000-3 comes with innovative, diffuse light measurement. This detects the level of light in its entire surrounding, taking better measurements than conventional light sensors. A must for budget-conscious management accountants and electricians.



Technical specifications

Power supply: COM1 / DALI
 220 - 240 V, 50 / 60 Hz
 Output COM1: max. 2000 W, maximum of 8 fluorescent lamps / LED lamps <math>C < 176 \mu F</math>
 Output DALI: 1x 2-conductor DALI control line / broadcast for 30 electronic ballasts
 Sensor technology: photodiode
 Angle of coverage: Diffuse
 Twilight setting: 2 - 1000 lux
 IP rating / protection class: IP 54 / III
 Temperature range: -20°C to +50°C
 Material: UV-resistant plastic

NM 5000-3
Surface-mounted, square (95x95x42mm)
 EAN white COM1 4007841 011897
 EAN white DALI 4007841 011703
 EAN black COM1 4007841 011880
 EAN black DALI 4007841 033729