
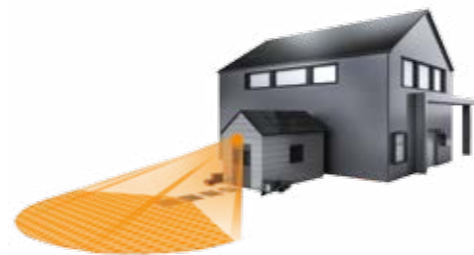


**High-tech.
Low energy.**

Are you looking for an starter model? The IS 1 infrared motion detector comes with perfected technology in unadorned design. It is particularly reliable, can be mounted on the wall or ceiling and is the ideal solution for monitoring areas with precision targeting in front of buildings and on driveways. It also provides excellent quality of detection and can be tailored to the specific conditions on site. The detector is wired up so quickly and easily, there's enough time left for gardening.

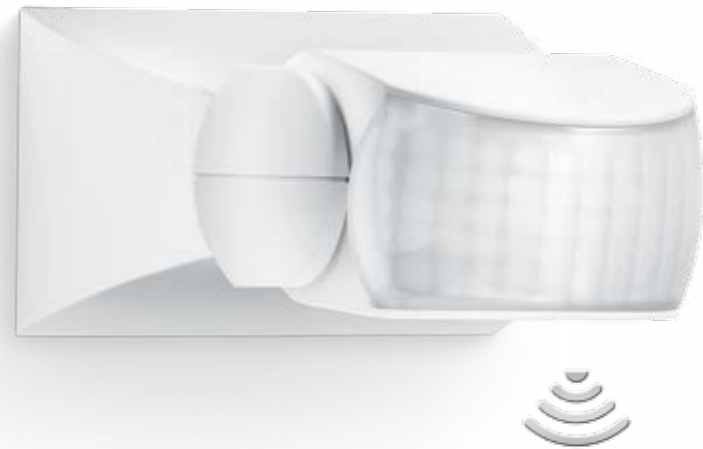

120°, 10m max.

| | |
|---------------------------------------------------------------------------|------------------------|
| EAN IS 1 white | 4007841 600310 |
| EAN IS 1 black | 4007841 600419 |
| Type | motion detector |
| Dimensions (h x w x d) | 50 x 80 x 120 mm |
| Power supply | 230 - 240V/50Hz |
| Sensor type | passive infrared |
| Where to use | indoors and outdoors |
| Installation | wall, ceiling |
| Max. output (resistive load, e.g. ordinary lamp) | 500 W |
| Max. output (uncorrected, inductive, cos φ = 0.5, e.g. fluorescent lamps) | 500 W |
| Max. output (electronic ballasts, capacitive, e.g. low-energy lamps) | 4 each max., C ≤ 88 µF |
| Angle of coverage | 120° |
| Capability of masking out individual segments | yes |
| Swivelling range | 60° |
| Tilting range | 180° |
| Reach | 10 m max. |
| Response brightness | 2 - 2,000 lx |
| Time setting | 8 sec. - 35 min. |
| IP rating | IP54 |
| Protection class | II |



For wall- and ceiling mounting



white



black

UV-resistant plastic

