

Corridor and Stairwell Light

FRS 20 LED

Our talented all-rounder.

Slim and versatile.

In developing the FRS 20 LED service and utility room light, we set ourselves the target of producing a light that reliably does its job in all sorts of different applications. Product perfection for the garage, basement or boiler room. The SensorLight in impact-resistant material works regardless of temperature, reliably detecting any movement without frequency of operation affecting lamp life.



LED
30 years
(Ø 4.5 h/day)

12,5w
700lm
56lm/W

high frequency
sensor 360°

ø 1–5 m

IP54



2–2000 lux

5sec – 15min

energy
saving

3 JAHRE
GARANTIE
functional
warranty

EAN FRS20 LED4007841 747619
Dimensions (h x w x d)	195 x 300 x 53 mm
Power supply	220–240 V, 50/60 Hz
Sensor type	High-frequency
Transmitter power	approx. 1 mW
HF system	5.8 GHz
Output	12.5 W
Additional switching capacity at L:		
(resistive load, e.g. bathroom /WC extractor fan)	200 W max.
Brightness	700 lm
Efficiency	56 lm/W
Colour temperature	3000K/SDCM 3
Colour rendering	Ra ≥ 80
LED life expectancy	50,000 h (L70B10 to LM80)
LED cooling system	Passive Thermo Control
Angle of coverage	360° with 160° angle of aperture
Reach	1–5 m max., continuously variable
Response brightness	2 - 2000 lx
Time setting	5 sec. – 15 min.
IP rating	IP54
Protection class	II
Impact resistance	IK07
Material	UV-resistant plastic
Temperature range	-10 to +40°C
With lamp	STEINEL LED system

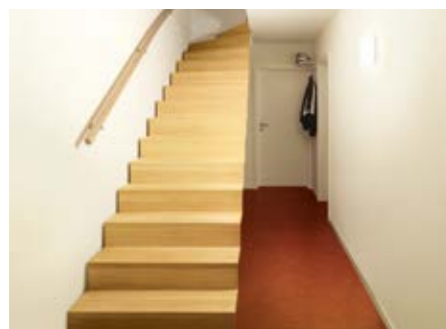

Including STEINEL LED system



Impact-resistant material rated to IK 07



UV-resistant plastic

