



150W MAX.

STEINEL®

HS 150DUO

HS 150 DUO

That's what we like to see.

A beaming winner.

In its modern design, the HS 150 DUO sensor-switched halogen floodlight puts the focus on eye-catching attractions, illuminates the way and frightens off unwelcome guests. It does all these jobs intelligently and reliably – whether it's raining, snowing or blowing a gale. We have developed this floodlight for all needs at the front of the home, driveways and side entrances, designing it to take lamps as powerful as 150 watts. Of course, the light-level threshold at which the sensor responds is defined by no other than you yourself. Just like many other settings. An ECO linear lamp is included.



infrared sensor 240°

max. 150W
R7s



max. 12m



IP 44



80° horizontal
150° vertical



networkable



2–2000 lux



10sec–15min



2m





energy saving

3 JAHRE
functional warranty



EAN HS150DUO white	4007841 633110
EAN HS150DUO platinum	4007841 646318
EAN HS150DUO black	4007841 633011
Dimensions (h x w x d)	215 x 155 x 170 mm
Power supply	230 - 240V/50Hz
Sensor type	passive infrared
Max. output	150 W/R7s linear halogen lamp
Additional switching capacity	
Max. output (resistive load, e.g. ordinary lamp)	800 W
Max. output (uncorrected, inductive, cos φ = 0.5, e.g. fluorescent lamps)	500 W
Max. output (electronic ballasts, capacitive, e.g. low-energy lamps)	4 each max., C ≤ 88 µF
Floodlight swivelling and tilting range	80° (swivelling), 150° (tilting)
Angle of coverage	240° with 180° angle of aperture
Response brightness	2 - 2,000 lx
Reach	12 m (temperature-stabilised)
Capability of masking out individual segments	yes
Time setting	.10 sec. - 15 min.
IP rating	IP44
Protection class	I
Material	UV-resistant plastic and aluminium floodlight head
Complete with lamp	yes, 125 W ECO linear lamp
Optional accessory	Corner wall mount 02 bracket for mounting on external corners
EAN EWH 02 white	4007841 630669
EAN EWH 02 black	4007841 630560

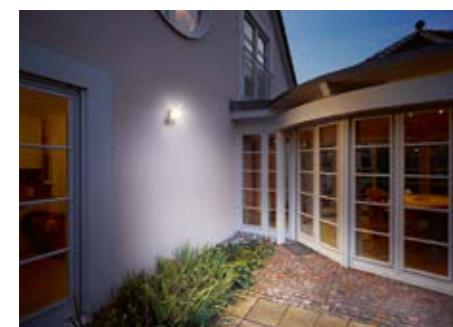

Including 125 W ECO halogen lamp



Highly effective ceramic reflector



UV-resistant plastic



Optional corner wall mount 02 bracket

